



Instructions For Use

IQ Messenger Medical 20.0.0

(English)





IQ Messenger B.V.
Pieter Zeemanweg 57
3316 GZ Dordrecht
The Netherlands
www.iqmessenger.com



© 2026 IQ Messenger B.V. All rights are reserved. To support the product described in this publication, the purchaser of the product is permitted to copy this publication, for internal distribution only. No other use, reproduction, or distribution of this publication, or any part of it, is permitted without written permission from IQ Messenger B.V.

IQ Messenger B.V. assumes no responsibility for any injury to anyone, or for any illegal or improper use of the product, that may result from failure to use this product in accordance with the instructions, cautions, warnings, or statements published in this manual.

No rights or claims can be derived from this document. IQ Messenger Terms and Conditions are always applicable.

References to other companies and their products use trademarks owned by the respective companies and are for reference purposes only.

Table of Contents

Introduction.....	3
About this manual.....	3
Requesting the Instructions for use	3
Symbol definitions.....	4
Intended purpose.....	5
Intended use.....	5
Intended user.....	5
Patient population	5
Precautions for use.....	5
Contraindications.....	6
Device description	6
Application overview	7
System specifications	8
IQ Messenger Medical server.....	8
Virtual hardware requirements	8
Firewall requirements	8
Hypervisor requirements	9
Supported browsers	9
IQ SmartApp Medical (Android)	10
License requirements.....	10
Hardware/Software requirement	10
Network/Firewall requirements	11
IQ SmartApp Medical (iOS)	12
License requirements.....	12
Hardware/Software requirements	12
Network/Firewall requirements	13
Device performance.....	14
Compatible apps.....	15
Compatible medical interfaces and devices.....	15
Installation	18
IQ Messenger Medical server.....	18
Pre-installation tasks.....	19
OVA template deployment.....	19
Configure the VM hardware settings.....	22
Configure the VM OS settings.....	23


License activation.....	25
IQ SmartApp Medical (iOS) installation.....	27
IQ SmartApp Medical (Android) installation.....	29
Operating Information.....	31
Application roles	31
Checkout procedures.....	33
Login procedures	33
Accessing about screen	34
Workflows	36
Graphical Event Assignment.....	40
Graphical Floor Plan.....	42
Real-time Console.....	44
Reports	45
IQ SmartApp Medical (Android)	46
IQ SmartApp Medical (iOS)	50
IQ SmartApp Medical icons	53
Maintenance instructions.....	55
Software updates	55
Database backup	55
Virtual machine disposal.....	55
Troubleshooting	56
Error and fault messages.....	57
Support	58
Device lifetime	58
Changes in the environment	58
Manufacturer	58

Introduction

We appreciate your decision to use the IQ Messenger Medical of IQ Messenger B.V. This product is approved for its safety as well as for its performance and quality.



This manual describes the system, the intended use, safety-related issues and the daily operation and interpretation of the systems interface and response.

About this manual


Before using the IQ Messenger Medical, we strongly recommend that you will read, understand and follow the operation and maintenance instructions of this manual, and especially the safety information with  symbols, throughout this guide. The safety information is provided for your benefit and for the benefit of your patients.


In this manual, you can find important information for using IQ Messenger Medical in a safe and responsible manner. Throughout these manual certain conventions are used. These are warnings, cautions and notes.

They are given as follow:

	WARNING: A warning is an alert to potential hazard which could result in serious product damage if proper procedures are not followed. CAUTION: A caution is an alert to a potential hazard which could result in minor product issues if the proper procedures are not followed.
	NOTE: Notes provide additional information or emphasize a point or procedure.

This manual was originally drafted in the **English** language.

	WARNING: Make sure that only authorized personnel use the device.
---	--

	Warning: Intended users are (Healthcare) professionals and must have sufficient knowledge of English to, understand the instructions for use and to, use the device as it is intended.
---	---








Requesting the Instructions for use

Instructions for use is supplied in electronic form an made available online via: <https://partner.iqmessenger.com> and/or by requests send to support@iqmessenger.com.

Instructions for use in paper format may be requested by contacting IQ Messenger contacting via support@iqmessenger.com and or telephone +31 88 20 20 333, and will be delivered within 7 days.

Symbol definitions

Pay attention to the labeling symbols throughout this document they indicate:

Symbol	Meaning	Description
	Manufacturer	Indicates the medical device manufacturer, as defined in EU Directives 90/385/EEC, 93/42/EEC and 98/79/EC.
	Date of manufacture	Indicates the date when the medical device was manufactured.
	Consult instructions for use	Indicates the need for the user to consult the instructions for use.
	CE-mark that shows European Conformity	The product has been CE (Conformité Européenne) marked and has the CE-mark on the instructions for use (IFU). The number behind the CE-mark identifies the responsible notified body.
	Caution	Indicates the need for the user to consult the instructions for use for important cautionary information such as warnings and precautions that cannot, for a variety of reasons, be presented on the medical device itself.
	Medical device	Indicates the item is a medical device
	Unique device identifier	Indicates a carrier that contains unique device identifier information

Intended purpose

Intended use

IQ Messenger Medical, as a redundant software-based platform, is a remote system which is part of a distributed information/alarm system (DIS/DAS/CDAS) and is intended to provide an interface with primary clinical (bedside) devices. This to provide a (secondary) means of acoustic, visual and/or vibratory alarms and clinically related event information, at near real-time, to designated client devices to inform healthcare professionals.

IQ Messenger Medical is beneficial to patient management as it provides mechanisms to reduce (acoustic) signals/alarms together with remote reception of medical-related events. It is not considered in and of itself to be diagnostic without skilled interpretation of healthcare professionals, does not replace or replicate the original display of data and alarms for the connected clinical devices and does not control or alter the behaviour of these connected clinical devices, or their associated alarms.

Mechanisms supporting increased patient management are alarm management features for alarm filtering and prioritization, alarm assignment, alarm visualization and reporting, confirmed alarm delivery, alarm handling including alarm confirmation, and escalation of alarms in case of delayed or no response by the alarm recipient.

IQ Messenger Medical supervises the interfaces of connected clinical devices and IQ Messenger Medical applications. IQ Messenger Medical actively informs the responsible staff in case alarms cannot be received on client devices and/or when an error is detected in the supervised alarm distribution.



WARNING: The scope of the CE marking applies to the IQ Messenger Medical applications and software modules defined in the section [Compatibel medical interface and interfaces](#).

Intended user

IQ Messenger Medical is intended for (Healthcare) Professionals only. Instructions for use are therefore provided in English. User must have sufficient knowledge of the English language to use the device.



WARNING: Intended users are (healthcare) professionals and must have sufficient knowledge of English to, understand the instructions for use and to, use the device as it is intended.

Patient population

The IQ Messenger Medical applications are not in contact with the patient. The patient population and patient conditions are established by the medical devices and systems with which the IQ Messenger Medical server is connected.

Precautions for use

Warnings and cautions described in this IFU should be observed.



WARNING: Unless all risk control options applied to IQ Messenger Medical, incorporation of IQ Messenger Medical in the medical IT-network will introduce risk that alarm events of medical source devices are not communicated to the user. To minimise this residual risk further, the responsible organisation is strongly advised to perform life cycle risk management for the medical IT-network.

Contraindications

IQ Messenger Medical application events are contraindicated in the event of any of the following foreseeable hazards of which users should become aware:

- When the network connection indication on the mobile device shows the absence of the medical IT network connection.
- The user's mobile device appears to be inoperable or damaged in any way.
- The user's mobile device is not turned on.
- The user is not logged in to the IQ Messenger Medical applications.

Device description

IQ Messenger Medical is a suite of web-based and mobile-based software applications that can be operated by healthcare and IT professionals using general-purpose hardware. These applications operate on a server, PC or mobile device. IQ Messenger Medical is part of a Distributed Alarm System (DAS/CDAS) that provides delivery of alarm conditions, from primary clinical devices via an IT network interface, with technical confirmation that includes the capability to receive a response from a healthcare professional using general-purpose devices.

Though IQ Messenger Medical the healthcare professionals receive interactive, time-critical information from primary clinical systems directly on their general-purpose devices. Received attributes related to the alarm message may include priority, icon, colour, tone, vibration and instructions. The user can configure IQ Messenger Medical to define alarm conditions. When an inbound alarm is received by IQ Messenger Medical matching the defined alarm conditions, triggers an alarm to be delivered to users and subsequently escalate in case of no or delayed response by the healthcare professional.

All messaging activities are recorded to provide real-time and historical activity logging for review and reporting purposes. IQ Messenger Medical operates in a redundant mode together with permanent supervision of all of its medical interfaces. IQ Messenger Medical supports the generic and widely used third-party Simple Network Management Protocol (SNMP) to supervise the third-party IT-network and to allow third-party SNMP-tools to supervise services running within IQ Messenger Medical.




WARNING: Monitoring of the IQ Messenger Medical server is required using an SNMP (Simple Network Management Protocol) monitoring solution to track and monitor critical system metrics in real-time, including application services, network bandwidth usage/latency, CPU usage, memory usage and storage utilization. This information is essential for ensuring the optimal performance and availability of the IQ Messenger Medical and diagnosing issues that may arise.

In addition, the SNMP monitoring solution must be capable of generating alerts and notifications when critical thresholds are exceeded or when system anomalies are detected, enabling IT staff to take proactive measures to prevent downtime and ensure continuous system operation.

Application overview

This section shows IQ Messenger Medical applications.

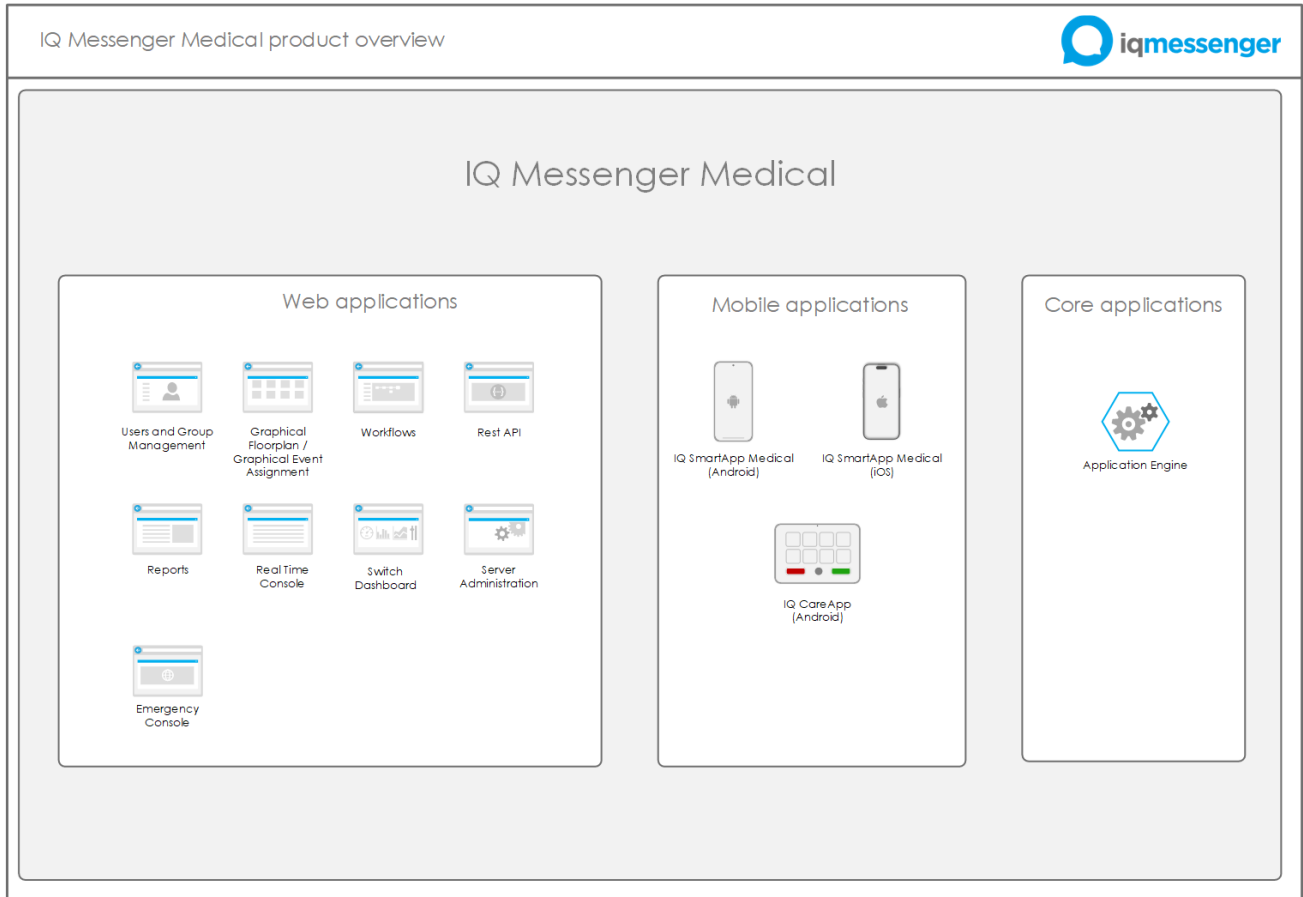

System specifications

The software specifications listed here are the minimum settings required to function.

IQ Messenger Medical server

Virtual hardware requirements

The following prerequisites must be met to deploy the IQ Messenger Medical virtual appliance:

Technical Specifications	Resource
Virtual CPUs	8 vCPU (2.4 GHz per core)
Virtual Network Interface	1 Gbps
Virtual Memory	32 GB
Virtual Storage	256 GB



CAUTION: Resource allocation must be dedicated to the IQ Messenger Medical server.

Firewall requirements

The following ports are used by the server. In addition to the ports listed below, additional ports may be required by specific integration interface that communicate with external systems. For more information, see the documentation for the integration.

Source	Destination	Port	Description
LAN	IQ Messenger Medical server	TCP (22)	SSH/SCP access to the server
IQ Messenger Medical server	DNS server	TCP/UDP (53)	Name resolution.
IQ Messenger Medical server	NTP server	UDP (123)	Time synchronization.
IQ Messenger Medical server	Internet	TCP (80)	HTTP connection to the update repositories. (optional)
IQ Messenger server	Internet	TCP (443)	HTTPS connection to the update repositories. (optional)
LAN	IQ Messenger Medical server	TCP (443)	Secure web access port on the IQ Messenger Medical server.



WARNING: The total average or maximum message transmission time is mainly dependant on the digital bandwidth capacity.

Hypervisor requirements

The following hypervisor platforms are supported:





- vSphere ESXi 8 or higher (Recommended to use OVA image)
- Microsoft Hyper-V/Azure

The following hypervisor features and operations are NOT supported:

- Fully automated Distributed Resource Scheduling (DRS)
- Fault Tolerance
- Online Snapshot
- Resume and Suspend

Supported browsers

The following browsers are supported:

Browser	Version
 Google Chrome	146 or higher
 Microsoft Edge	146 or higher
 Mozilla Firefox	146 or higher
 Safari	18 or higher



WARNING: The IQ Messenger Medical server availability is dependent on both the network and system availability.



WARNING: The IQ Messenger Medical server shall always run in High Availability.





WARNING: During the cluster failover, it is not possible to process event messages.

IQ SmartApp Medical (Android)

This section contains information about license, hardware/software and network requirements for the IQ SmartApp Medical (Android) app.

License requirements

The following table lists the available license codes:

	Product name	Product code	Description
	Basic SmartApp Android	02.036.1000	Basic license for the use of SmartApp for Android including 10 SmartApp Android device licenses
	SmartApp Android RFA1	02.036.1010	License for the use of 1 additional SmartApp Android device
	SmartApp Android RFA10	02.036.1020	License for the use of 10 additional SmartApp Android devices
	SmartApp Android RFA50	02.036.1030	License for the use of 50 additional SmartApp Android devices
	SmartApp Android RFA250	02.036.1040	License for the use of 250 additional SmartApp Android devices

Hardware/Software requirement

The following table lists the required hardware and software configuration:

Product name	Software version
Google Android	10
	11
	12
	13
	14
	15

Please note that we usually limit our mobile support on versions that represent of market shares.

Hardware component	Minimum requirement
CPU	1.6 Ghz dual-core or higher
Memory	2GB RAM or higher
Storage	200 MB free space on the device storage.
Network	A Wi-Fi or cellular network connection is needed to communicate with the IQ Messenger Medical server. For cellular connections, a 3G network or faster is required.
Optional components	GPS Camera Bluetooth Low Energy NFC

Network/Firewall requirements

The following table provides the required network port information for network planning and troubleshooting:


Source	Destination	Port	Description
IQ SmartApp Medical (Android)	IQ Messenger Medical server	TCP (5671)	IQ SmartApp Medical (Android) secure communication port to the IQ Messenger Medical server.
IQ SmartApp Medical (Android)	SIP Server	UDP (5060)	IQ SmartApp Medical (Android) SIP communication port to the SIP server. <i>(optional)</i>
SmartApp Enterprise Android	IQ Messenger Server	TCP (443)	SmartApp Enterprise Android secure login communication port to the IQ Messenger Server. Used for SAMLv2/SSO.
IQ SmartApp Medical (Android)	SIP Server	UDP (10000~20000)	IQ SmartApp (Android) RTP communication ports to the SIP server. <i>(optional)</i>

IQ SmartApp Medical (iOS)

This section contains information about the license, hardware/software, and network requirements for the IQ SmartApp Medical (iOS) app.

License requirements

The following table lists the product codes:

	Product name	Product code	Description
	Basic SmartApp iOS	02.037.1000	Basic license for the use of SmartApp for iOS including 10 SmartApp iOS device licenses
	SmartApp iOS RFA1	02.037.1010	License for the use of 1 additional SmartApp iOS device
	SmartApp iOS RFA10	02.037.1020	License for the use of 10 additional SmartApp iOS devices
	SmartApp iOS RFA50	02.037.1030	License for the use of 50 additional SmartApp iOS devices
	SmartApp iOS RFA250	02.037.1040	License for the use of 250 additional SmartApp iOS devices

Hardware/Software requirements

In order to fit the IQ SmartApp Medical (iOS) requirements the iOS device must have appropriate hardware and software possibilities. The following configuration is required:

Product name	Software version(s)
Apple iOS	v18 v26

Please note that we usually limit our mobile support on versions that represent of market shares.

Product name	Minimum requirement
iPhone	iPhone 17 iPhone 16 iPhone 15 iPhone 14 iPhone 13 iPhone 12 iPhone 11 iPhone SE (2nd generation or later)

Network/Firewall requirements

The following table provides the required network port information for network planning and troubleshooting:

Source	Destination	Port	Description
iOS device	Apple Push Notification Service (APNs)	TCP (443)	Used during device activation, and when devices are unable to communicate to APNs on port 5223.
IQ SmartApp (iOS)	IQ Messenger Server	TCP (443)	IQ SmartApp (iOS) secure login communication port to the IQ Messenger Server.
IQ Messenger server	Apple Push Notification Service (APNs)	TCP (2197)	Used to send notifications to the APNs gateway.push.apple.com gateway.sandbox.push.apple.com
iOS device	Apple Push Notification Services (APNs)	TCP (5223)	Used by devices to communicate to the APNs servers
IQ SmartApp (iOS)	IQMessenger Server	TCP (5671)	IQ SmartApp (iOS) secure communication port to the IQ Messenger Server.
IQ SmartApp (iOS)	SIP Server	UDP (5060)	IQ SmartApp (iOS) SIP communication port to the SIP server. <i>(optional)</i>
IQ SmartApp (iOS)	SIP server	UDP (10000~20000)	IQ SmartApp (iOS) RTP communication ports to the built-in SIP server. This port may differ when using a 3 rd party SIP server. <i>(optional)</i>
SIP server	IQ SmartApp (iOS)	UDP (4000~4019)	SIP server RTP communication ports to the SmartApp Enterprise. <i>(optional)</i>

Devices using APNs need a direct connection to Apple's server. If a device is unable to connect using cellular data, it will attempt to use Wi-Fi if available. If there is a proxy server on the Wi-Fi network, the device will not be able to use APNs, because APNs require a direct and persistent connection from the device to the server.

When connecting to APNs, iOS devices will use the cellular data connection if it's available. Only if the cellular connection is not available or viable will the device switch to Wi-Fi for APNs connections.

The APNs servers use load balancing, so your devices will not always connect to the same public IP address for notifications. The entire 17.0.0.0/8 address block is assigned to Apple, so it's best to allow this range in your firewall settings.

IQ Messenger Medical server requires static IP-Address configuration and an internet connection is required to access the Apple Push Notification Services (APNS).

Device performance

This section of the instructions for use contains performance indicators for the IQ Messenger Medical applications.

- Application engine:
 - The average incoming message processing time of 100 ms
 - The average incoming message processing time of 100 ms
 - The average amount of 5000 event processes per second
- Web applications:
 - The average event flow saving time of 1 second.
 - The average staff assignment time of 500 milliseconds.
- Mobile applications:
 - The average mobile end-point delivery time of 200 ms (time from smartphone device to the application engine)
 - The average mobile end-point response time of 200 ms (time from user acknowledge to the application engine)
 - The average processing time of 200 ms for erase-on response and erase-on time-out messages.
- Cluster:
 - Failover time between master to slave cluster shall be 10 seconds.
 - The synchronization of the database in a clustered setup is near real-time.
 - File replication time is near real-time. (Files are only replicated when they are changed.)


Compatible apps

IQ Messenger Medical 20.0.0 version is compatible with the following IQ SmartApp Medical versions:

- IQ SmartApp Medical (Android) 15.0.0 or higher
- IQ SmartApp Medical (iOS) 15.0.0 or higher

Compatible medical interfaces and devices

This section contains details of the supported medical interfaces available for use with IQ Messenger Medical server.



WARNING: The scope of the CE marking applies to the IQ Messenger Medical applications and to the listed software modules. The listed software modules below are supported by IQ Messenger Medical applications. If a device/version is not listed Distributors must contact the manufacturer. If a device is not listed and yet still is connected IQ Messenger Medical will not be supported.

Vendor	Interface	Supported devices	Communication
arcomed ag	UniQue Concept PDMS Interface	UniQue DOC Concept <ul style="list-style-type: none"> • Volumed® μVP7000 • Syramed® μSP6000 	TCP/IP
Baxter	PrisMax	Baxter PrisMax v3.x	Serial (RS-232)
BD Medical (Carefusion)	Alaris Syringe Pump Communications Protocol	Alaris GH Alaris CC Alaris TIVA Alaris GH Guardrails Alaris CC Guardrails Alaris PK Alaris PK Plus Alaris GH Plus Alaris GH Plus Guardrails Alaris GH Plus Alaris GH Plus Guardrails Alaris CC Plus Alaris CC Plus Guardrails) Alaris Enteral Alaris Enteral Plus	Serial (RS-232)
	Alaris Gateway Workstation Protocol	BD Alaris Gateway Workstation Supported pumps: <ul style="list-style-type: none"> • Alaris GH • Alaris CC • Alaris TIVA • Alaris GH Guardrails • Alaris CC Guardrails • Alaris PK • Alaris PK Plus • Alaris GH Plus • Alaris GH Plus Guardrails • Alaris CC Plus • Alaris CC Plus Guardrails • Alaris CC Plus 	TCP/IP

		<ul style="list-style-type: none"> • Alaris CC Plus Guardrails • Alaris Enteral • Alaris Enteral Plus • Alaris GW • Alaris GW 800 • Alaris GP Plus • Alaris GP Plus Guardrails • Alaris VP Plus Guardrails 	
	Alaris GW Volumetric Pump Communications Protocol	Alaris GW 800 v6r1a	Serial (RS-232)
B. Braun Melsungen AG	Bedside Communication Controller (BCC)	Space Station (SpaceCom)	TCP/IP
Dräger	ESPA 4.4.4	Dräger Infinity Gateway	Serial (RS-232)
	WinAccess API	Dräger Infinity Gateway	TCP/IP
	Dräger RS 232 MEDIBUS	Apollo Babylog 8000 (SC) Babylog 8000 plus Babylog VN500 Carina Cato Cicero B Cicero C Cicero EM Evita 2 Evita 4 Evita Infinity V500 Evita V300 Evita XL Fabius series Julian Narkomed 2B Narkomed 2C Narkomed 3 Narkomed 4 Narkomed 6000 Narkomed 6400 Narkomed GS Narkomed Mobile Oxylog 3000 plus Pallas Perseus A500 PhysioFlex Primus Primus Infinity Empowered SA2 Savina Savina 300 Savina 300 Select	Serial (RS-232)

		Sulla Titus Trajan Zeus Zeus Infinity Empowered	
	Dräger RS 232 MEDIBUS.X	Apollo Atlan Babyleo TN500 Babylog VN500 Babylog VN600/VN800 Babyroo TN300 Carina Evita V300 Evita Infinity V500 Evita V600/V800 Fabius series Isolette 8000 plus Oxylog 3000 plus Oxylog VE300 Perseus A500 Primus Primus Infinity Empowered Savina 300 Zeus Infinity Empowered	Serial (RS-232)
GE Healthcare	Datex-Ohmeda	CARESCAPE R860 Ventilator	Serial (RS-232)
	S/5 Computer Interface	CARESCAPE Monitor B450 CARESCAPE CANVAS 1000 CARESCAPE ONE	Serial (RS-232)
	Patient Data Link	Giraffe and Panda Family Incubator and Warmer	Serial (RS-232)
Getinge (MAQUET)	Computer Interface Emulator (CIE)	Servo-i Ventilator System Servo-s Ventilator System	Serial (RS-232)
Getinge (MAQUET)	FLOW-i Communication Interface (FCI)	FLOW-i AGC FLOW-i C20 FLOW-i C30 FLOW-i C40	Serial (RS-232)
Getinge (MAQUET)	SERVO Communication Interface (SCI)	Servo-u Servo-n Servo-air Servo-c	Serial (RS-232)
Hamilton	External Communication Hamilton RS232 Block Protocol v1.1.0	HAMILTON-C1/T1 HAMILTON-C2 HAMILTON-C3 HAMILTON-C6 HAMILTON-G5/S1	Serial (RS-232)
HL7	Health Level 7	ADT	TCP-IP
IHE	IHE Patient Care Device (PCD-004) protocol	IHE PCD ACM profile	TCP-IP
Itemedical	MDDG alarm distribution interface	MediScore MDDG server	TCP-IP

LivAssured	NightWatch	NightWatch Base	TCP-IP
Mindray	HL7 Protocol IHE PCD ACM (ORU_R40)	Mindray eGateway	TCP/IP
Philips	Data Export Interface	IntelliVue Patient Monitor Avalon Fetal Monitor	UDP/IP
Philips	OAP v3	Philips IntelliSpace Event Manager	TCP/IP
Vyaire	acuLink v3/v4	Fabian HFO	Serial (RS-232)

Installation

This section contains the installation procedures for the IQ Messenger Medical applications.

IQ Messenger Medical server

The IQ Messenger Medical server comes as an OVA (Open Virtualization Appliance) file. It is available from the download section of the IQ Messenger partner website. The OVA file is a template that contains a functional CentOS operating system. To deploy the IQ Messenger Medical OVA file, follow the instructions.

After you deploy the .ova file, you can start configuring your IQ Messenger Medical server. The virtual appliance is a complete environment with the IQ Messenger Medical server components.

Before you begin deployment, make sure that all requirements are met. Once you finish the deployment and configuration process, you can connect to the IQ Messenger Medical server using the web interface.



WARNING: The software installation should only be done by the manufacturer or by the distributor. On some occasions, other parties are permitted for installation the software but only with the assistance of the manufacturer or an authorized person.



WARNING: System configuration must be performed only by qualified personnel who are trained and familiar with the IQ Messenger Medical and relevant communication standards, and with local implementation of the medical device aggregator. Improper configuration of the IQ Messenger Medical can cause unexpected and unintended behavior of the system.

CAUTION: Without the signed quality documentation the device is not fully configured. The Distributor is to provided these documents as per knowledge base article in the partner portal.

It is the responsibility of the Distributor to perform the preparatory activities prior to the use of the device. IQ Messenger Medical must be used only after obtaining a valid license from the manufacturer or the Distributor.



WARNING: Proof that all preparatory actions have been performed can be found in the about screen: CE marking will be visible. Only when the CE marking is visible in the about screen the device has been configured and verified to work as intended.

Pre-installation tasks

This section outlines the tasks that need to be completed before beginning the server deployment. It provides details on the following tasks:

- Obtain the OVA template image: To acquire the IQ Messenger Medical server OVA file, visit the downloads section of the IQ Messenger partner portal.
- Collect the network settings: Prior to deploying the IQ Messenger Medical server, record the network configuration. The installation process will request this information to connect the server to the network and complete the installation.

OVA template deployment

Once you have downloaded the IQ Messenger Medical OVA template file, you can use the vSphere client to create the virtual machine from the deployment package OVA template. To deploy the template:


Launch the VMware vSphere web client, enter your user name and password and select Login.

Install the Client Integration plug-in before you deploy an OVF template. This plug-in enables OVF deployment on your local filesystem.

Depending on the security settings of your browser, you might have to explicitly approve the plug-in when you use it the first time.




Select *Hosts and Clusters* from the *Menu*.

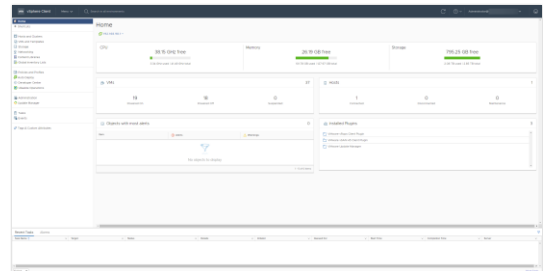


Select any inventory object that is a valid parent object of a virtual machine, such as a datacenter, folder, cluster, resource pool, or host.

Select *Actions > Deploy OVF Template*

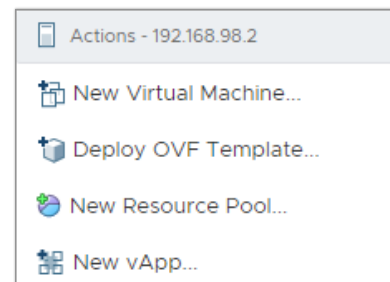


Select the source location of the OVA file.


Select *Browse* and locate the OVA file on your computer.

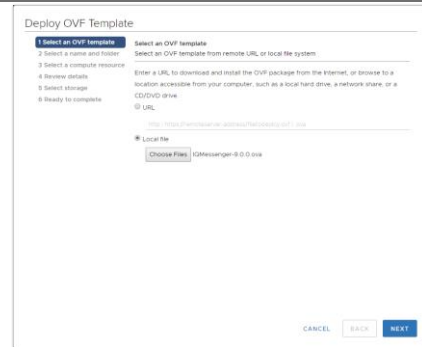


Specify the name and location for the deployed template. The name can contain up to 80 characters and it must be unique within the inventory folder.

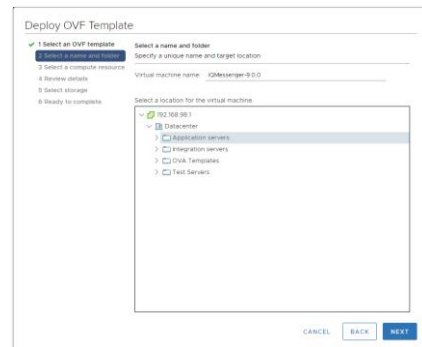

Select or browse for a resource (host, cluster or resource pool) on which you want to deploy the OVF template.

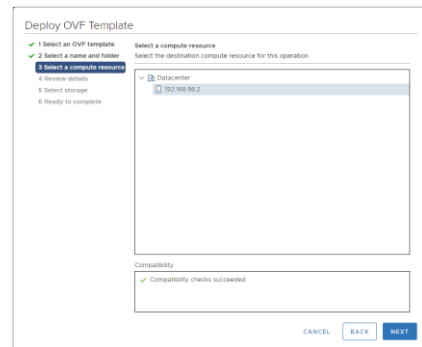


Review the OVA template details. This page details the download size, size on disk, and description.

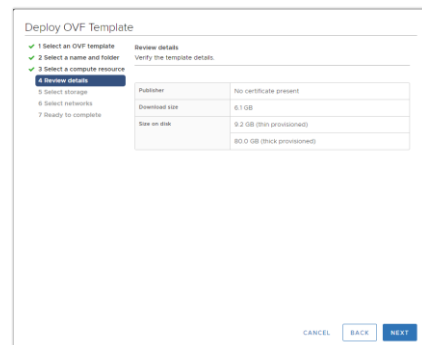


Select the data storage location to store the virtual machine files.

Select virtual disk format *Thick Provision Lazy Zeroed*.

Thick Provision Lazy Zeroed option allocates the disk space statically (no other volumes can take the space), but does not write zeros to the blocks until the first write takes place to that block during runtime (which includes a full disk format)

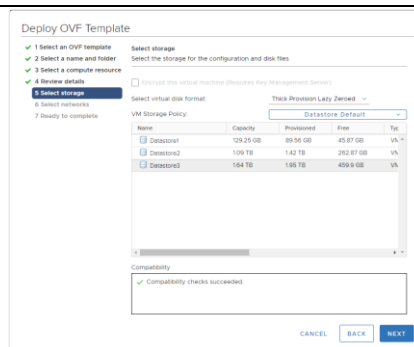


Configure the network the deployed OVF template should use.

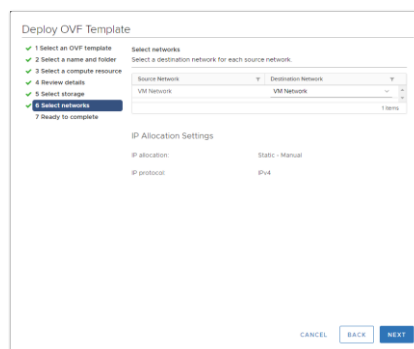

Review the template configuration. Make sure that Power on after deployment is not enabled. You might need to configure the VM hardware and resource settings prior to powering on the Emergency Console server.

Select *Finish* to deploy the OVF template.


In the *Ready to Complete* window, review the selected options for the OVF deployment task and click *Finish*. The deployment job runs and provides a completion status window where you can track job progress.

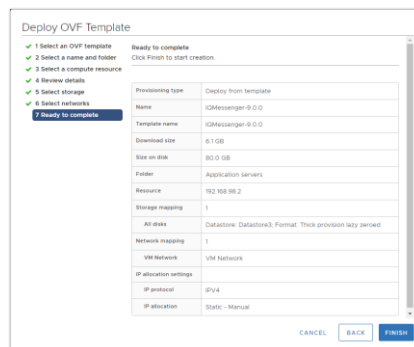


Configure the VM hardware settings

Before powering on your IQ Messenger Medical VM you must configure the virtual memory, and virtual CPU to match your IQ Messenger Medical VM. See section [Virtual hardware requirements](#) for IQ Messenger Medical server VM requirements.

In the vSphere web client, select deployed OVA template in the left pane and then right-click the name of the deployed template, and select *Edit Settings*.

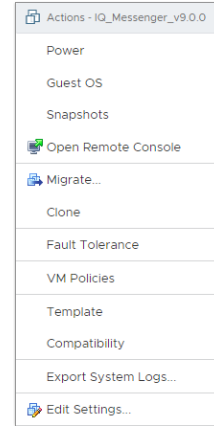

In *Virtual Hardware* tab, configure the memory and CPU requirements.

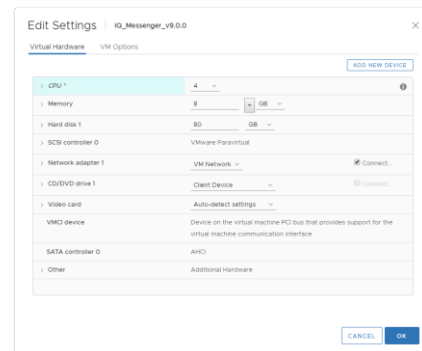

You can now proceed to power on.


Open the *Console*. The mouse is then captured and cannot leave the console screen. As the console is text-only, no mouse pointer is visible.

Configure the VM OS settings


After deploying the IQ Messenger Medical OVA file, configure the basic settings, and start IQ Messenger Medical server. To configure the server, follow these steps:

Log in to the vSphere Client and power on the IQ Messenger Medical virtual machine. Begin the configuration by providing the login credentials:


Localhost login: **iqm**
Password: **IQMessenger!**

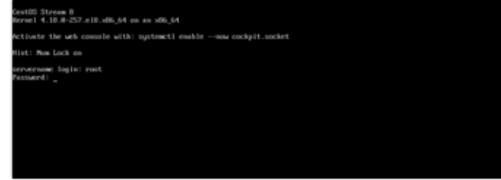


Configure the time zone and save the changes.

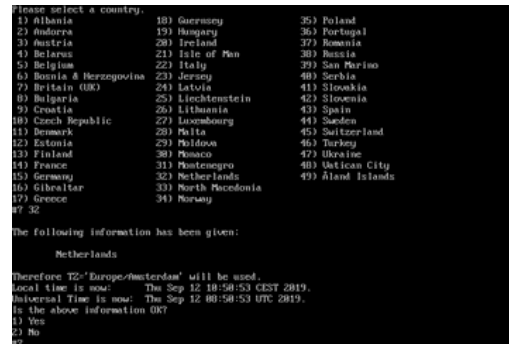

Go to the device configuration.

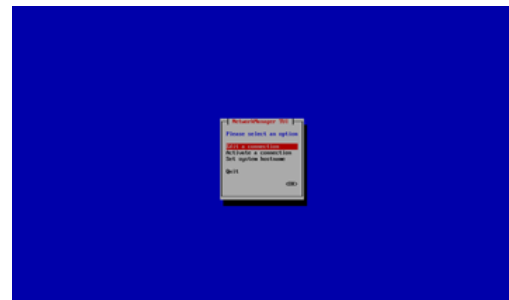


Select the available ethernet device from the list; then Edit. This example shows ENS192 but this can be different.

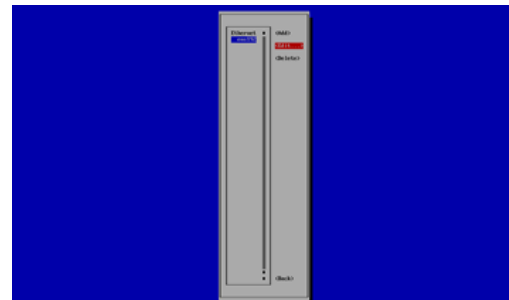


Edit the ethernet device configuration and enter the *Manual IP* configuration. Click OK to Save.




Go back to the main screen and set hostname for the server. Click OK to save.

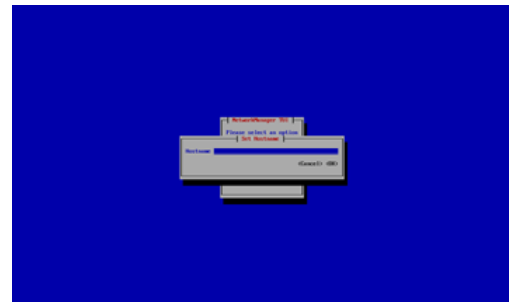


Choose Quit from the menu to finalize network configuration.

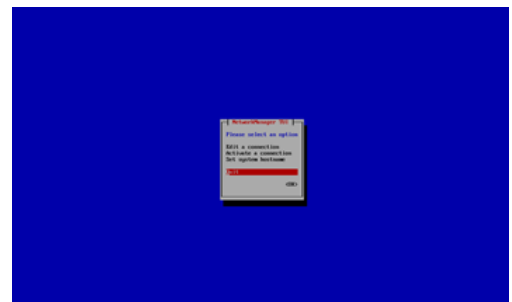


Enter a new password for the iqm account and reconfirm it. The iqm password is used for logging into the IQ Messenger Medical Virtual Appliance for future configurations and maintenance.



After this step Virtual Appliance automatically reboots.

 **WARNING:** Modifying, deleting or replacing any IQ Messenger Medical server files or changing any of the device settings can result in sub-optimal IQ Messenger Medical server performance, including inhibition of alarm delivery, system time settings and network connection.

6. The server will automatically reboot after license activation. Wait until services are started; then, navigate to the server login page "<https://<ServerIP>>".

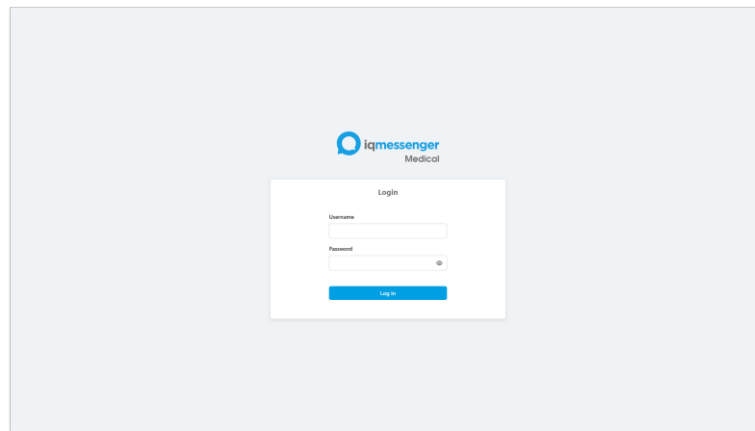


The default username and password for the IQ Messenger Medical server is **admin**. It is highly recommended to change the admin password after the initial server setup.



IQ SmartApp Medical (iOS) installation

IQ SmartApp Medical (iOS) is distributed through the Apple AppStore. To install the IQ SmartApp Medical (iOS), perform the following steps:

1. Open the *App Store* and go to the *Search* tab.
2. Search for *IQ SmartApp Medical* and choose *Get*.

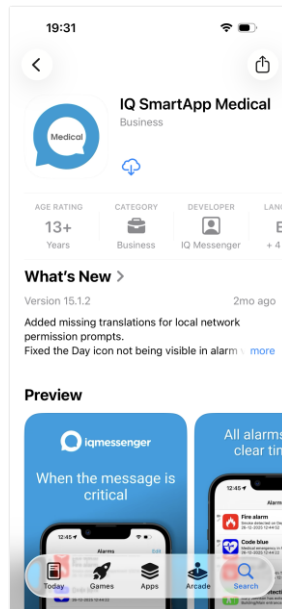


3. A new screen is displayed once the installation is completed. Close the screen by tapping the Home button on your iOS device.
4. Start IQ SmartApp Medical (iOS) app and *Allow* the app the send *Notifications* and *Critical Alerts*.




WARNING: Not allowing notification type *Critical Alerts* for iOS devices can cause alerts without an audible signal resulting in an unnoticed or delayed alert and could result in patient injury.

- When you start IQ SmartApp Medical (Android) for the first time, you must configure the *Internal Server Address* of the IQ Messenger Medical server. If the IQ SmartApp Medical (iOS) is also being used outside of the company network, then also fill in the *External Server Address* of the IQ Messenger Medical server. This information is basically provided by the IT facility.

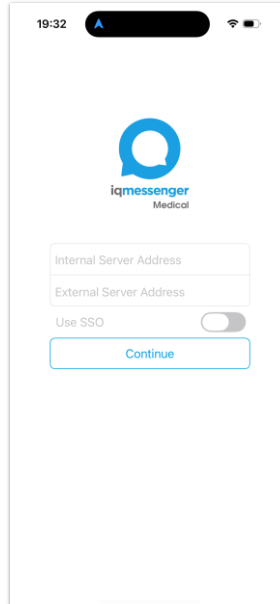

- Enter the provided username and password to login to the app.

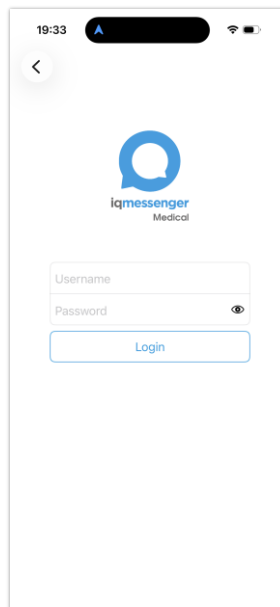


- The *Events* screen is displayed when successfully logged in.

IQ SmartApp Medical (Android) installation

IQ SmartApp Medical (Android) is distributed as offline APK file or through the Google Play store.


To install the IQ SmartApp Medical (Android) on offline devices, perform the following steps:

1. Create a folder named (*SmartApp*) on your desktop and copy the offline installation file (*SmartApp-<version>.apk*) into the *SmartApp* folder.
1. Plug the device into the computer via the device USB cable and use the computer's file manager to copy the *SmartApp* folder from your computer to the SD card or local device storage.
2. Unplug the device from the computer.
3. Open the file manager on your device and browse to the *SmartApp* folder.
4. Tap on the *SmartApp-<version>.apk* file. Make sure that the first selection, *Unknown Sources*, is checked so that you can install *SmartApp* (APK) file from a location other than the Google Play Store. You can change this setting back after the IQ SmartApp Medical (Android) installation.

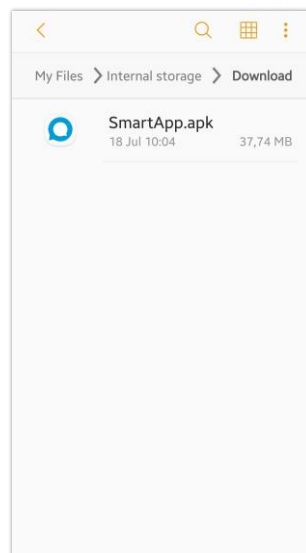


5. A new screen showing the IQ SmartApp Medical installation. To install the application, just tap on the Install button on the bottom of the screen.
6. A new screen is displayed once the installation is completed and you can choose to immediately run the application by tapping the Open button at the bottom of the screen. Otherwise click on Done button to complete the *IQ SmartApp Medical (Android)* installation.

7. When you start IQ SmartApp Medical (Android) for the first time, you must configure the *Internal Server Address* of the IQ Messenger Medical server. If the IQ SmartApp Medical (Android) is also being used outside of the company network, then also fill in the *External Server Address* of the IQ Messenger Medical server. This information is basically provided by the IT facility.

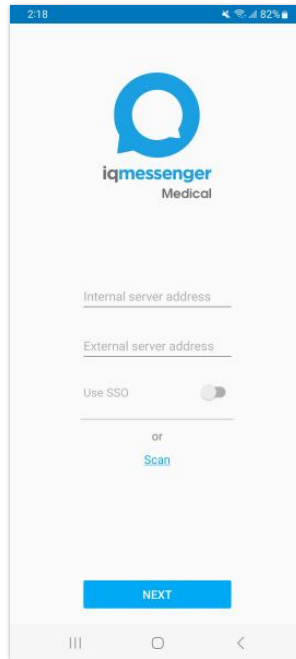

8. Enter the provided username and password to login to the app.

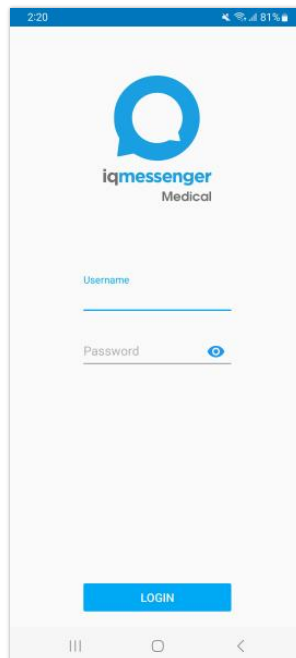


9. The *Events* screen is displayed when successfully logged in.

Operating Information

This section contains information regarding the operation of IQ Messenger Medical, such as maintenance and disposal.

Application roles

This section contains information regarding the application user roles and access rights. The menu item's visibility depends on your application roles and permissions.

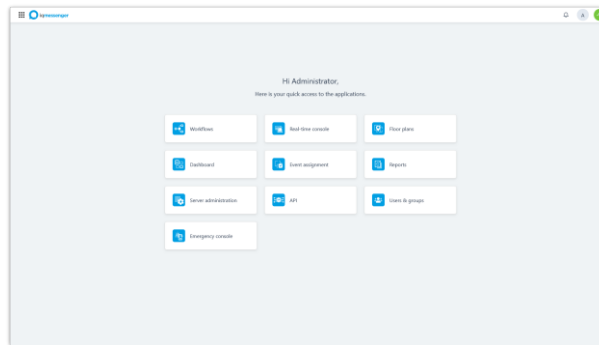

Application roles	API	Emergency Console	IQ CareApp (Android)	IQ SmartApp Medical (Android)	IQ SmartApp Medical (iOS)	Graphical Event Assignment	Graphical Floorplan	Real Time Console	Reports	Server Administration	Switch Dashboard	User and Group Management	Workflows	Workflows Administration
Admin						●	●		●	●				
API user	●													
CareApp Android user			●											
Contact administrator												●		
Emergency console administrator		●												
Emergency console dashboard user		●												
Emergency console group admin		●												
Emergency console presence user		●												
Emergency console recipient admin		●												
Emergency console report user		●												
Emergency console scenario admin		●												
Report user									●					
Reports administrator									●					
GFP administrator							●							
GFP user							●							
GEA administrator						●								
GEA user						●								
RTC user								●						
SmartApp Android user				●										
SmartApp iOS user					●									
Switch administrator											●			
Switch read-only user				●	●						●			
Switch user				●	●						●			
User and group management administrator												●		
Workflows administrator														●
Workflows user													●	

Checkout procedures

At the start of each shift, users should check to be sure the equipment is working correctly before they begin to perform their tasks on the unit. The user should verify that their mobile device is working correctly. User should ensure that the web browser is functioning as required to assign users to the unit. Contact IQ Messenger distributor or IT department for assistance if problems occur.


Checkout procedures for the user consist of the following steps.

- Swap the device's batteries. Place the charged battery in the device, and put the used battery into the charger.
- If using a smartphone, place the device in the charging station. The user should select a fully charged unit.
- Send a test alarm and check the time between alarm initiation on the medical device equipment and the alert receipt on the mobile device. Total latency should be under 5 seconds.


Login procedures

To login to the IQ Messenger Medical server, perform the following steps:

1. Start your preferred web browser; then, enter the IP address or servername of the IQ Messenger Medical.
2. Enter the provided username and password to login to the app.

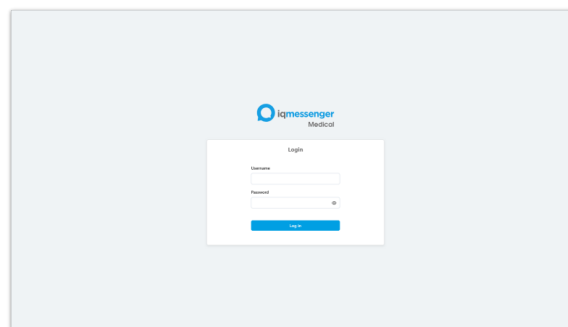

3. The main application screen is displayed after successfully user login.

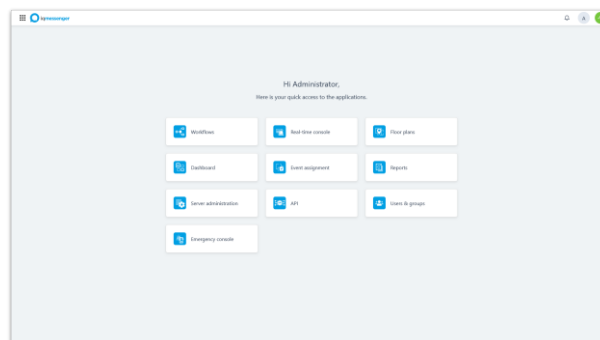


Accessing about screen

The *About* menu on the IQ Messenger Medical applications displays a screen that containing information about the manufacturer, product version and release date.


To access the about screen on the IQ Messenger Medical server, login to the system and click on the About menu in the navigation bar.




NOTE: You may access this Instructions for Use document from web-based and mobile application by tapping/clicking on the link <https://partner.iqmessenger.com>

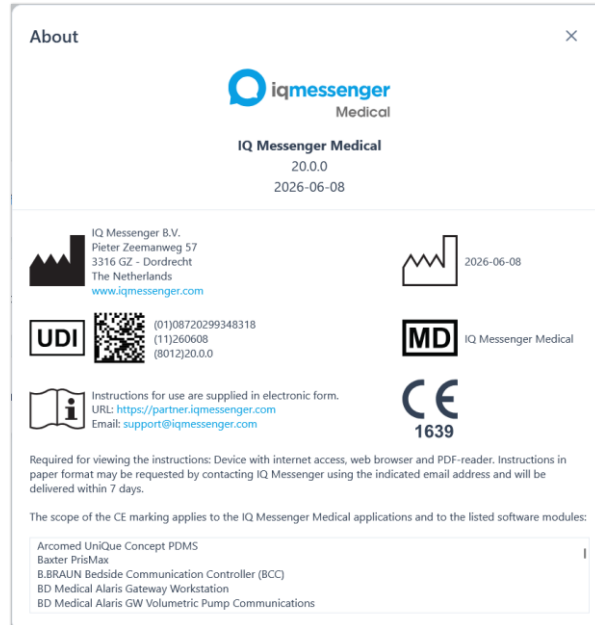

To access the about screen on the IQ SmartApp Medical (Android), access the In-App *Settings* menu and tap on the *About* menu.

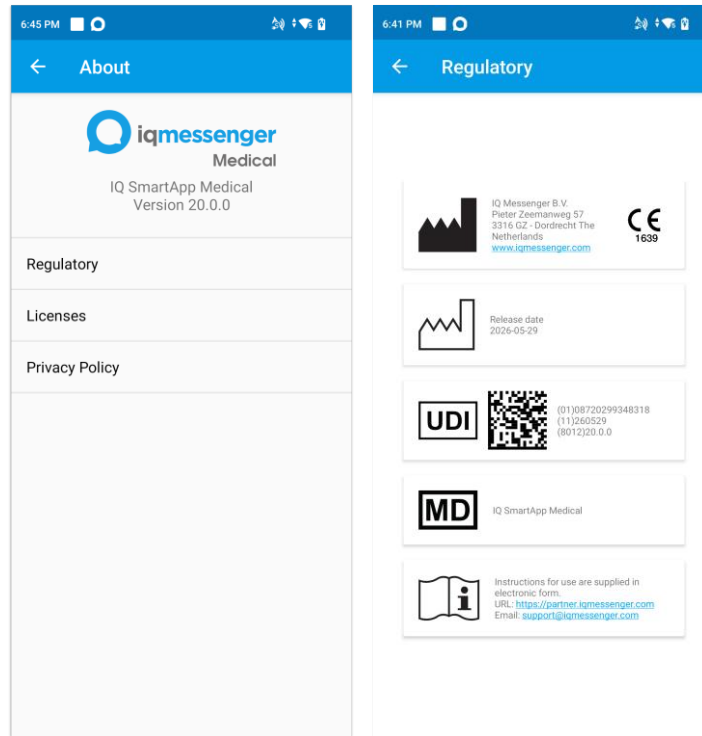

To access the about screen on the IQ SmartApp Medical (iOS), access the In-App *Settings* menu and tap on the *About* menu.

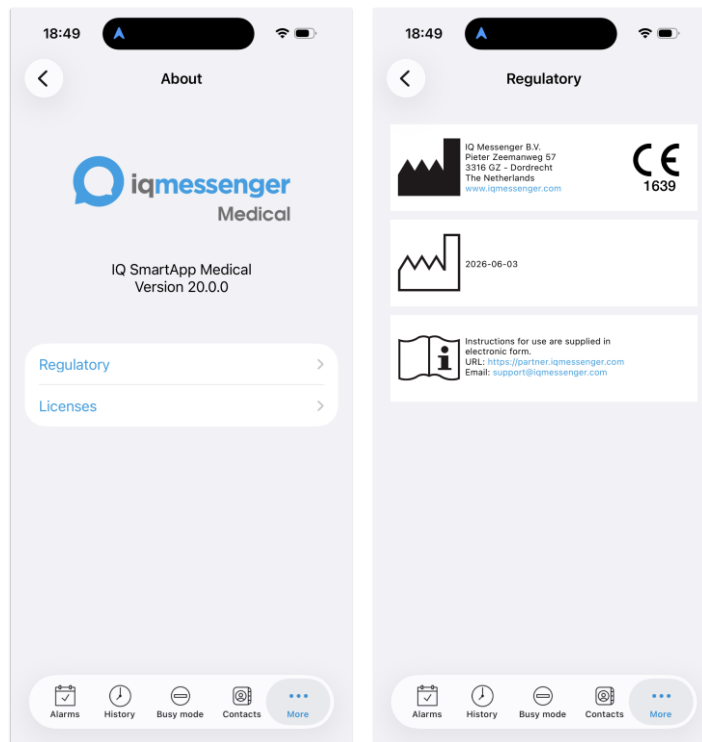

Workflows


The *Workflows application* provides all integration configuration options that are available within the IQ Messenger Medical server.







NOTE: For a detailed description of operating information please refer to the setting and configuration guide of the application. This document can be requested through your IQ Messenger Medical distributor.

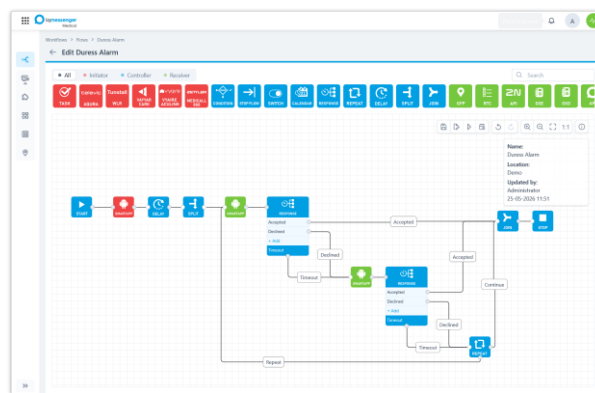To access the Workflows, perform the following steps:

1. Start your preferred web browser; then, enter the IP address or servername of the IQ Messenger Medical.
2. Login with provided username and password.
3. Click on the *Workflows* menu in the navigation bar to access Workflows.



Each icon represents an administration service. The icons below are the available in IQ Messenger Medical.

Icon	Description
	<p>Integration services:</p> <p>This screen allows you to configure integration services before activating them. Each service must be properly configured to ensure successful communication and operation within the system..</p>
	<p>Configuration items:</p> <p>Configuration items are used during the device registration process (e.g., handsets, medical devices, etc.). They define the specific parameters and settings required for each device to function correctly within the integration framework.</p>
	<p>Configuration groups:</p> <p>Configuration groups enable administrators to manage collections of configuration items more efficiently. Administrators can add, edit, delete, or copy groups, making it easier to apply consistent configurations across multiple devices.</p>
	<p>Locations:</p> <p>Locations allow you to define and manage physical or logical places that can be associated with configuration items. When a device is first created, it is assigned to a location. Associating devices with locations helps identify and track them based on where they are deployed or used.</p>

The Workflows application provides a user-friendly interface for setting up and managing flows. An flow defines the work process followed by healthcare professionals in other words, the specific steps taken when an event is received. The Workflows application offers a graphical interface to design, visualize, and manage these processes easily.

A workflow is the visual representation of a work process. Using the Workflows application, you can work with existing flow definitions, modify them to create new ones, or build reusable flow templates from scratch. These reusable event flow definitions can be incorporated into new workflows, allowing you to design efficient processes quickly and reduce the risk of configuration errors.



NOTE: For a detailed description of operating information please refer to the setting and configuration guide of the application. This document can be requested through your IQ Messenger Medical distributor.

Basic components

Before start creating an workflow, the knowledge of the basic components is required. The Red icon correspond to receiving an alarm. A Green icon corresponds to delivering information to the selected output. Blue icons are the conditions in the event flow that determine for example escalations, stop flow, calendar, multiple red or profile switching.

Every flow contains at least 4 mandatory elements in the following order:

1. Blue start icon is the start of an event flow.
2. Red icon is the source of an event. Also known as input.
3. Green icon is the destination of an event. Also known as output.
4. Blue stop icon is the stop of an event flow.

The basic event flow will have the following appearance when using only 1 Red icon (input) and 1 Green icon (output):



The line  —  between icons represents a connection logic.

The more detailed step-by-step explanation of a flow creation is in the following chapter.

Red icon

A red icon represents a flow input. More precisely, it symbolizes the primary event trigger of an event flow. This icon indicates that the flow is initiated by event messages originating from various sources e.g. medical devices.

The flow must begin with a red icon and it serves as the starting point or trigger of the flow. The red icon must be configured to accept a specific event from a specific device or source. Typically, the configuration process involves selecting the device and specifying the type of event or alarm to be accepted.

Green icon

A green icon represents an event output system. This system transmits a events to one or more receivers. The event can take various forms such as a telephone call, message, email or SMS.

A receiver may be a handset, smart device, emergency call unit, or software system. The receiver notifies the user about the incoming events through means such as a ringtone, sound alert, or blinking LED indicator.










Additionally, a green icon can generate and send events to other green icons, enabling chained or interconnected event outputs within the system.




Blue icons

A blue icon is intended to display all connections and ways in an alarm flow.

The Start and the Stop elements are mandatory in each flow and cannot be removed. Every flow starts with the Start element and ends with the Stop element.

The other elements serve to construct complicated flows. A complicated flow can include several ways of event flows' execution. The condition of each way is defined by a set of blue icons. It can be a time interval (date) within which the flow is allowed. An alarm can be split in order to be sent to different receivers and, vice versa, different events from different sources can be directed to one receiver (joined). Each blue icon from the table below will be discussed in detail in the corresponding section.

Icon	Description
	The Start element is automatically added to flow. It marks the entry point of the workflow and does not require any configuration.
	The Condition element enables filtering of alarms or events based on specific criteria. It helps control which events continue through the workflow.
	The Stop Flow element allows the workflow to revoke or cancel a previously triggered alarm when it is stopped at the source. To use this feature, the connected integration (indicated by the red icon) must support sending a stop or cancel message from the originating device, such as a medical or nurse call system.
	The Switch element routes events based on the current state of a configured switch on the dashboard. This enables dynamic event routing depending on whether the switch is turned on or off, allowing state based workflow behavior.
	The Calendar element allows workflows to route or process events based on date and time conditions. This enables time-based logic, such as working hours, shift schedules, or holidays.
	The Response element provides advanced escalation and user response handling within flows. It enables capturing user actions or acknowledgments and can drive further workflow decisions based on those responses.
	The Repeat element allows specific parts of the workflow to be executed multiple times based on defined intervals. It is typically used for retrying actions, sending recurring notifications, or looping through a process until a condition is met.
	The Delay element pauses the workflow for a defined period before continuing to the next step.
	The Split element divides a single event into multiple parallel branches. This allows simultaneous processing of different logic paths within the same workflow.

 JOIN	The Join element merges multiple event branches back into a single branch. It is typically used to synchronize parallel branches before continuing the workflow.
 SAVE	The Save Flow element is used to save and store the current flow configuration, ensuring that all changes are preserved.
 STOP	The Stop element marks the endpoint of the workflow. It is automatically added and does not require any configuration.

Graphical Event Assignment

This section describes the main features of the Graphical Event Assignment web application. Patient information features may not be available, depending on your licenses or activated features. On the *Event Assignment* screen, you can assign, unassign devices to the locations, and view patient information.



WARNING: The IQ Messenger Medical server is dependent upon the accuracy of your facility's HL7 ADT solution for patient information shown and send to IQ Messenger Medical applications and or third-party devices or systems.














NOTE: For a detailed description of operating information please refer to the setting and configuration guide of the application. This document can be requested through your IQ Messenger Medical distributor.


To assign a device to a GEA location, perform the following steps:


1. Start your preferred web browser; then, enter the IP address or server name of the IQ Messenger Medical; then, click Graphical Floor plan on the application menu.
2. Choose the *Event assignment* on the navigation bar.
3. Choose the location from the location selection filters where you want to assign a device(s) to a location.




Label/Symbol	Description
Location	Location selection filters
	Zoom in
1:1	Reset zoom
	Fit image to screen
	Zoom out
	Show patient information for all locations
	Location marker
	Show all assignments

	No patient assigned to location/no patient information available
	Patient assigned to location/patient information available
	No devices are assigned to this location for receiving events
	Devices are assigned to this location for receiving events and devices are online
	Devices are assigned to this location for receiving events but devices are offline
Devices	Overview of available device to assign to a location, when device is greyed out then user is not logged in/available for receiving calls

4. Click on  to show location assignment box.
5. Drag and drop a device from the list of *Devices* to the desired field.

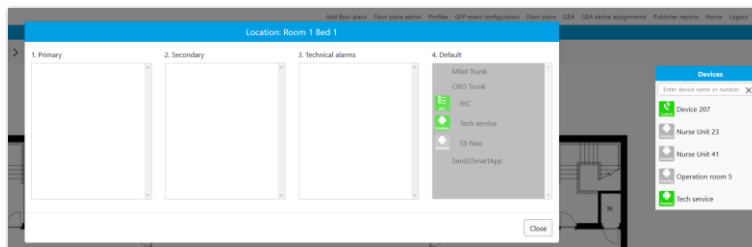


The drag and drop actions in this example configure automatically in the previously created event flow that all initial calls are send to *GEA User* and if this user does not respond on time, the call will be escalated to the users defined in the *Secondary call* list. In this case *GEA User2*

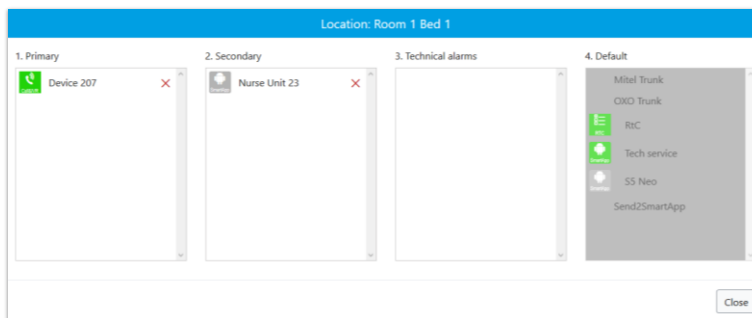

The *GEA Default* is the static group that you cannot adjust from this drag and drop screen by default. However if the checkbox “*Allow editing from GEA*” is checked in Backoffice group administration, you can change the users. If there is no response on the *Primary call* and no response in the *Secondary call*, then the call escalates to all users in the *GEA Default* group even if the users are not assigned to this location.

In the following specific situations, IQ Messenger Medical server may not deliver alarm notifications to the web-based and mobile applications or supported third party mobile or wired devices or systems:



WARNING: The assigned user has exited the unit.



WARNING: The assigned user is logged out of, or disconnected from, the IQ Messenger Medical web-based or mobile application.



WARNING: A user is not assigned to receive alerts from a medical device.

Graphical Floor Plan

This section describes the main features of the Graphical Floor Plan web application. Some of the features may not be available, depending on your licenses.




NOTE: For a detailed description of operating information please refer to the setting and configuration guide of the application. This document can be requested through your IQ Messenger Medical distributor.

On the *Floor plans* screen, you can view, acknowledge, and clear active events. To access the *Floor plans* screen, perform the following steps:


1. Start your preferred web browser; then, enter the IP address or server name of IQ Messenger Medical; then, click on the Floor plan menu on the application menu.







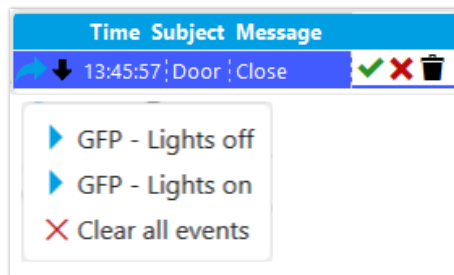

Label/Symbol	Description / Value
Location	Location selection filters
	Zoom in
1:1	Reset zoom
	Fit image to screen
	Zoom out
	Show send
View selection	View multiple floor plans. Available options are: <ul style="list-style-type: none"> • 1 floorplan • 2 floorplans • 4 floorplans • 9 floorplans

	<ul style="list-style-type: none"> • 16 floorplans • 32 floorplans • 64 floorplans
	Heartbeat status
Send message	The <i>Send message</i> button opens in a panel at the bottom of the page. It provides a list of all the Graphical Floor Plan events on the page, including the custom message field.
Message	Field for customizing output message
Send	Send message to the selected Graphical Floor Plan events.
Include client card	Include client card (related information)

Right click on the marker to activate the run flow menu.



Label	Description
	Open related URL.
	Download attached file.
	Accept event.
	Reject event.
	Delete event.
	Run event.


Real-time Console

This section describes the main features of the Real-time Console web application. Some of the features may not be available, depending on your licenses. On the Real-time console screen, you can view, acknowledge and clear active events.



NOTE: For a detailed description of operating information please refer to the setting and configuration guide of the application. This document can be requested through your IQ Messenger Medical distributor.

To access the Real-time Console application, start your preferred web browser; then, enter the IP address or server name of IQ Messenger Medical; then, click on the *Real-time console* menu on the application menu.

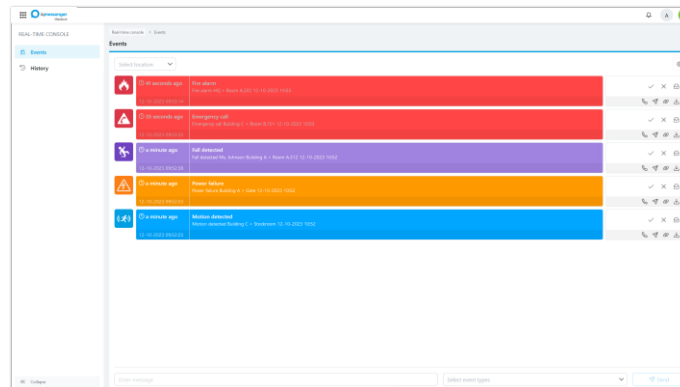

Label	Description
✓	Accept response button
✗	Reject response button
📁	Archive button
📞	Callback response button
📍	Forward event
🔗	Open related URL
📄	Download attached file
📹	Open related camera
👤	Open client card
🔇	Silent listen-in

Reports


This section describes the main features of the Reports web application.



NOTE: For a detailed description of operating information please refer to the setting and configuration guide of the application. This document can be requested through your IQ Messenger Medical distributor.

To access the reports application, perform the following steps:

1. Start your preferred web browser; then, enter the IP address or server name of IQ Messenger Medical; then, click on the Reports on the application menu.
2. Choose from selection filters required report parameters where you want to request information.

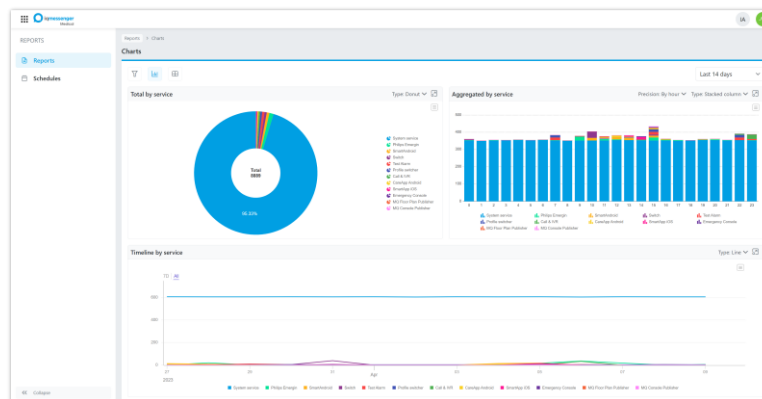

Label/Symbol	Description
	Search by flow execution id
	Flow details
	Send report by e-mail
	Download csv file
	Download pdf file

3. The Reports pane will automatically refresh based on the filtering selection.
4. Click on expand button on desired row to see the flow details.

Date and time	Service name	Device name	Message	Response	Status
Mar 08, 2021, 10:06:51.156	Hamilton RS232 Block Protocol	Ventilator ICU	Ventilator ICU available		Started

5. To export the report use send by email, download csv file or download pdf file.

IQ SmartApp Medical (Android)

This section describes the main features of the IQ SmartApp Medical (Android) app. Some of the menu items may not be visible depending on activated features on the app or mobile device hardware capabilities.




NOTE: For a detailed description of operating information please refer to the setting and configuration guide of the application. This document can be requested through your IQ Messenger Medical distributor.


When you start IQ SmartApp Medical (Android) for the first time, you must configure your device as either a shared device or a personal device. A shared device is used by more than one person, such as a nurse on shift. A personal device is used by one person only.

To login to the IQ SmartApp Medical (Android), perform the following steps:


1. Start IQ SmartApp Medical (Android) app, then enter the provided username and password.

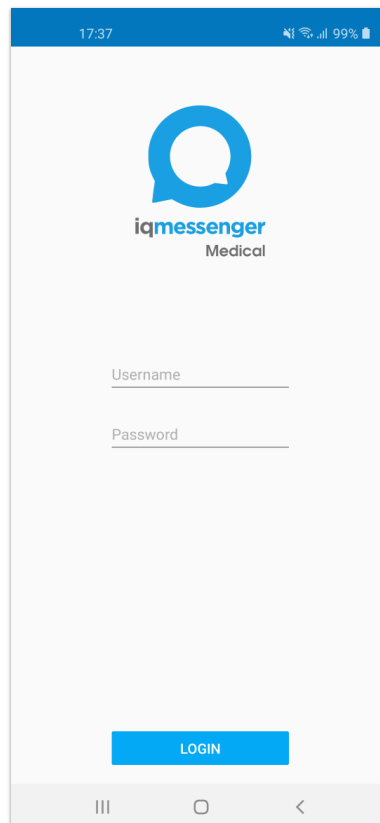


2. The *Events* screen is displayed after successfully user login.

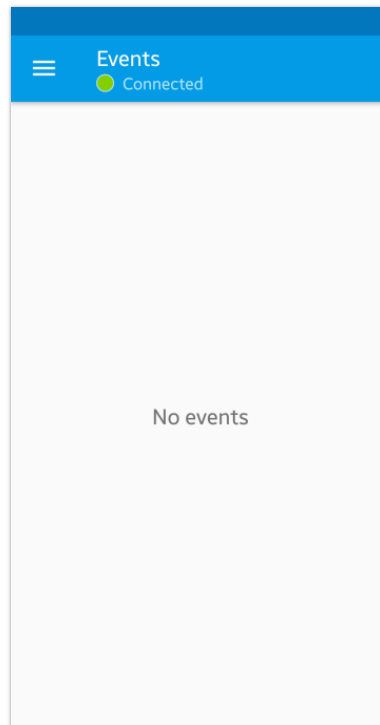


3. By opening the side menu you can access available IQ SmartApp Medical features.

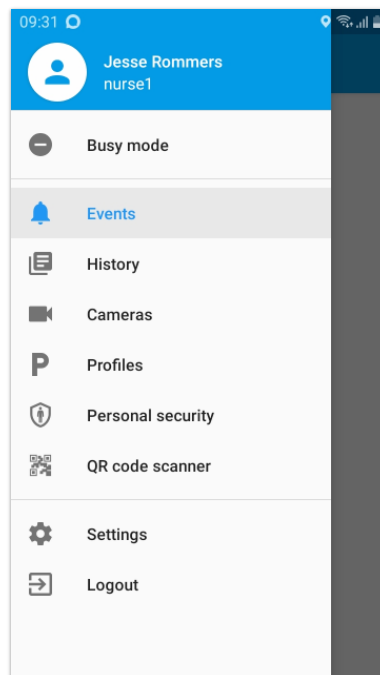


- The *Events* screen shows all active events. The event messages are sorted by their priorities. By tapping on the event message the *Event detail* will be shown.

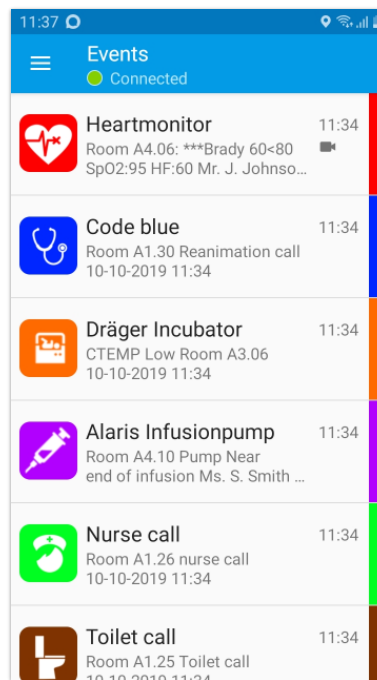

- The *Events* details screen shows all details events that are sorted by their priorities. By tapping on the event message the *Event detail* will be shown. In this screen you can respond to the event messages.

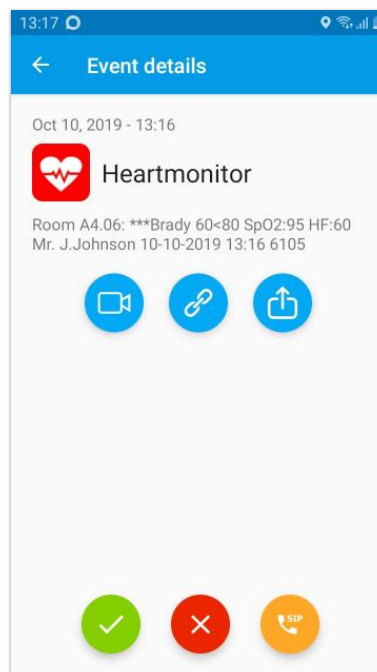

- All information about the historical events are stored in the history and can be called up again afterwards by the user. The callback number, app link, camera and hyperlink URL's to events that have already been received can also be used at a later point in time.

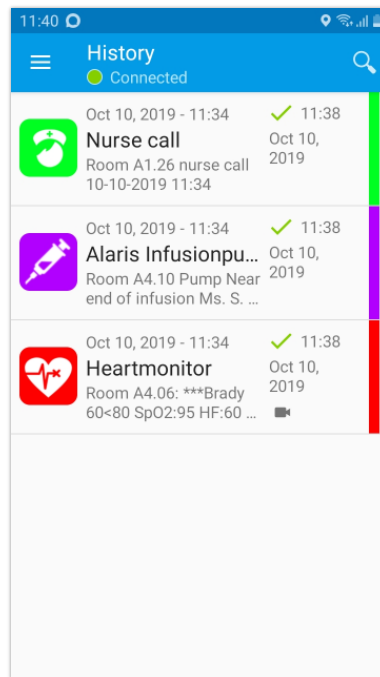

IQ SmartApp Medical (iOS)


This section describes the main features of the IQ SmartApp Medical (iOS) app. Some of the menu items may not be visible depending on activated features on the app or mobile device hardware capabilities.




NOTE: For a detailed description of operating information please refer to the setting and configuration guide of the application. This document can be requested through your IQ Messenger Medical distributor.

To login to the IQ SmartApp Medical (iOS), perform the following steps:


1. Start IQ SmartApp Medical (iOS) app, then enter the provided username and password.

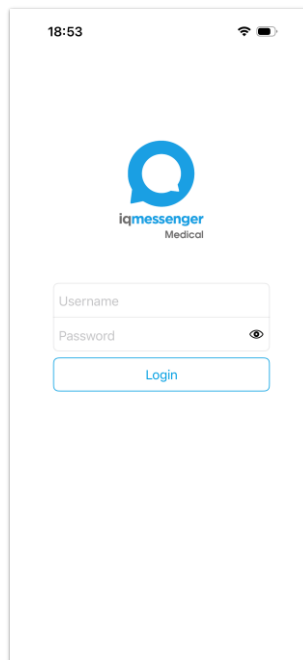


- The *Events* screen is displayed after successfully user login.

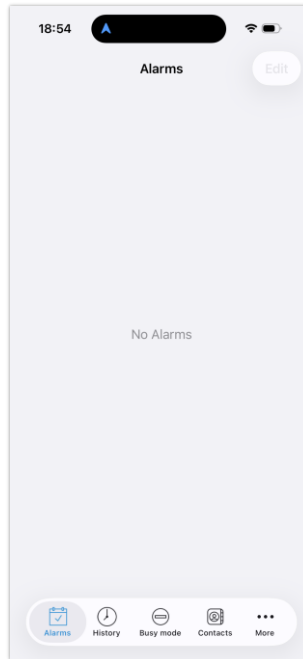


- The *Events* screen shows all active events. The event messages are sorted by their priorities. By tapping on the event message the *Event detail* will be shown.

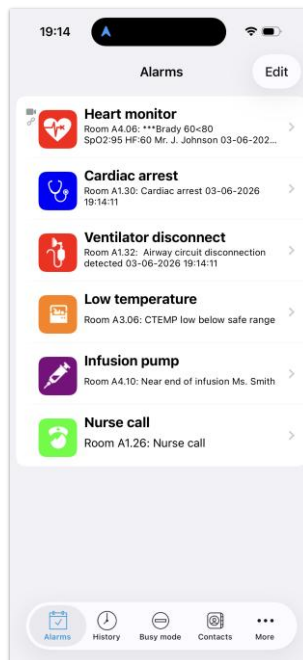

- The *Events* details screen shows all details events that are sorted by their priorities. By tapping on the event message the *Event detail* will be shown. In this screen you can respond to the event messages.

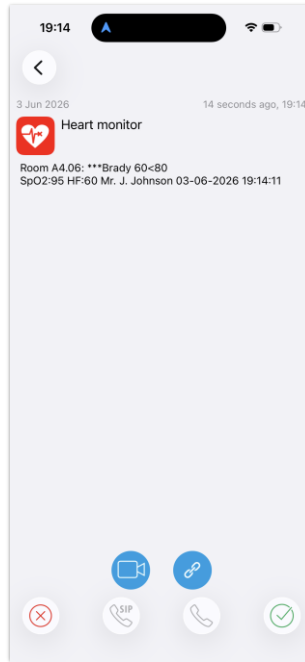



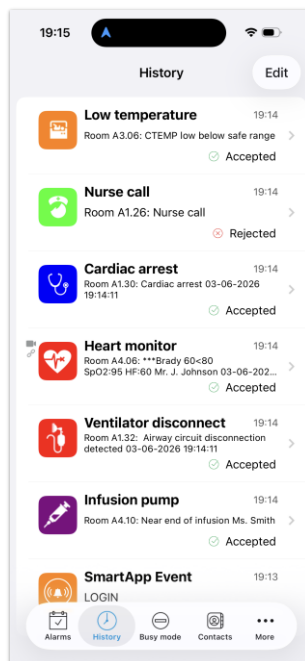





























































5. All information about the historical events are stored in the history and can be called up again afterwards by the user. The callback number, app link, camera and hyperlink URL's to events that have already been received can also be used at a later point in time.



Warning: IQ SmartApp Medical (Android) notify the user and the server in case of low battery on a Google Android device. Apple iOS device do not support this functionality.

IQ SmartApp Medical icons

The following set of icons are used by the IQ SmartApp Medical apps for alarm notification. The icons may have different color depending on the event flow setup.

							
Acoustic detection	Aggression / panic	Assault	Bath	Battery alarm	Battery low	Bed	Bed alarm
							
Bed alarm, assistance	Breathing ventilator	Cafe	Connected	Contact closed	Contact open	Day	Dementia
							
Disconnected	Doctor	Door	Door call	Door closed	Door open	Dry ground	Dust
							
ECMO	Elevator call	Emergency call	Enteral infusion pump	Epilepsy	Escalator	Evacuation	Fall
							
Fall detection	Fire	Gauge	General alarm	General alarm call	General alarm, assistance	Heart monitor	Heart stop
							
Heating	High water	Inactive alarm	Incubator	Indoor location detection	Intercom	Kidney	Light off
							
Light on	Loudspeaker	Low water	Lung	Maintenance	Man Down	Medical heartbeat	Medicine
							
Meeting	Metal barrel in water	Microphone level	Microphone off	Microphone on	Moisture	More attendants needed	Motion detection

							
Night	No WiFi / Wireless network	No heating	No medical heartbeat	No power	Nuclear	Nurse	Nurse call
							
One attendant needed	Outdoor location detection	PIR Sensor	Power	Privacy off	Privacy on	Pull cord	Pump
							
Room service	Sprinkler	Syringe infusion pump	Technical fail	Temperature	Temperature high	Temperature low	Three attendants needed
							
Tide	Toilet call	Toilet call, assistance	Toxic / hazard	Tread mat	Two attendants needed	UPS	Valve
							
Video camera	Volumetric infusion pump	Wander detection	Warning / danger	Wireless alarm	Water dam	Water discharge	Water flow rate
							
Water level	Water salinity	Water temperature	Water warning	Waves	Weather vane	Bed sores	Out of chair
							
Sitting on bed	Sitting on chair						

Maintenance instructions

IQ Messenger Medical requires a mobile device and a computer system with a web browser. There is minimal maintenance for the end user.

Software updates

Periodically, the manufacturer will release updates to software, and upgrades to the capability of the system. The manufacturer will provide release notes detailing the proposed changes to current software, new features and improvements that will be released, and any known issues at the time of release.

The manufacturer may decide to release a critical update to more or all releases in use in the field. In the case of a safety incident that relates to the use of the software, the manufacturer will provide adequate follow-up actions during the lifetime as required by law.

Database backup

On a daily base, the server will create a full backup of the application files including the database. This database is in a ready state and able to be restored to the server. This may be necessary in the case of loss of data, loss of server, or a similar situation that would require a restoration of the database. IQ Messenger Medical distributor is able to provide this service at any time required. As an extra precaution, in the event of a system failure, the database backup should be configured to export to a network shared drive or SFTP server on the customer's local network. This option is configured within the Server Administration interface.

Virtual machine disposal

Manufacturer recommends following customer internal procedures for the destruction of a virtual machine. There will be no physical hardware to dispose of, due to the nature of a virtual machine.

Troubleshooting

This section of the instructions for use is intended to help resolve user issues or problems with IQ Messenger Medical applications.



WARNING: (Healthcare) professionals must be trained on proper action instructions for alarms, and hospitals must schedule routine equipment inspection and calibration.



WARNING: Do not rely solely on the IQ Messenger Medical server and connected web-based and mobile applications, third-party mobile or wired devices, or systems to indicate medical device alarms. Always continue to monitor at primary, the patient's medical device and or the medical central station if applicable and respond to the patient primary medical device alarms.

The mobile device is not receiving alarms

If the mobile device is not receiving any alarms, please review the following steps:

- Ensure that the device is turned on and the battery is charged. If the mobile device will not boot up, please contact your IT facility.
- Once the mobile device is on and has completed the initial boot, check the wireless strength indicator. The wireless strength indicator is usually located top of the device screen. If the display indicates that the device has no wireless connection, please contact your IT facility.
- When using IQ SmartApp Medical apps, be sure the application is running and you are logged in.
- Ensure that the device is online in Graphical Event Assignment. At the beginning of every shift, all staff carrying mobile devices must sign in to the Event Assignment module. All staff using a fixed device must sign into the phone. If you have signed into a Graphical Event Assignment module and are still not receiving any alarm, please contact your IT facility.

In the following specific situations, IQ Messenger Medical server may not deliver alarm notifications to the web-based and mobile applications or supported third-party mobile or wired devices or systems:



WARNING: The IQ Messenger Medical web-based, or mobile application is turned off, being obstructed or without a network connection.



WARNING: The mobile device is turned off or the battery is depleted.



WARNING: The mobile device is not receiving communications due to being obstructed or out of wireless coverage range.



WARNING: The mobile device is not communicating with the IQ Messenger Medical server.

The mobile device is not receiving the correct alarm information

If the mobile device is not receiving the correct alarm information, including too many or not enough alarms from the IQ Messenger Medical server, please review the following steps:

If the mobile device receives alarms for more than the assigned locations (patient rooms).

- Review your assignments in the Graphical Event Assignment application.
- If carrying a mobile device, you may be part of an escalation group. If this is the case, you will receive an alarm in case of an alarm escalation.
- If the mobile device is receiving the correct alarm for a location, but it does not contain the correct patient data, please contact your IT facility to correct HL7 ADT information.



WARNING: The IQ Messenger Medical server is dependent upon the accuracy of your facility's HL7 ADT solution for patient information shown and sends to IQ Messenger Medical applications and or third-party devices or systems.

The user is not noticed about received alarms

Complete the following steps when a user is not noticed about received alarms:

- Verify that the user is logged into the apps and the mobile device is turned on.
- Verify that the mobile device is connected to the wireless network.
- Check the volume of the mobile device if IQ SmartApp Medical (iOS) is used without critical alert notification, and adjust the volume of the device if needed.



WARNING: Turning down or off the phone ringer/vibrate will preclude IQ Messenger Medical from effectively notifying the user of alerts.



WARNING: The mobile device volume is turned down too low or turned off.

Error and fault messages

All error messages and fault messages that are generated by the IQ Messenger Medical applications are self-explanatory.

Support

For reporting errors in the software, please contact your IQ Messenger Medical software distributor. One must have knowledge of the software and must be an authorized person.

Device lifetime

The lifetime of the system is 1 year. During this time, IQ Messenger will periodically provide patches to fix non-critical issues in the latest release. Critical updates addressing safety related bugs, will be provided for all releases within their lifetime.

Changes in the environment

Changes to the product and environment are always documented in the product release notes.

Manufacturer

The IQ Messenger Medical and all its applications are manufactured by:



IQ Messenger B.V.
Pieter Zeemanweg 57
3316 GZ Dordrecht
The Netherlands
www.iqmessenger.com

To request additional information, please contact IQ Messenger B.V.